User Manual

Ematic - ESB210

Attaching the Stand

You can use the stand to install this unit on a shelf. Make sure you place the unit on a flat surface.

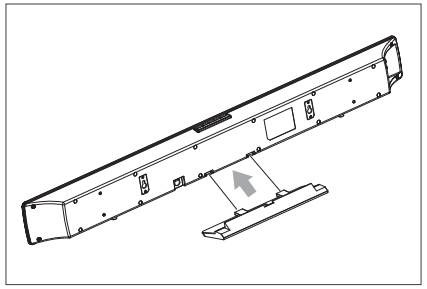

Connect
Slide the supplied stand onto the bottom of the main unit until you hear a click.

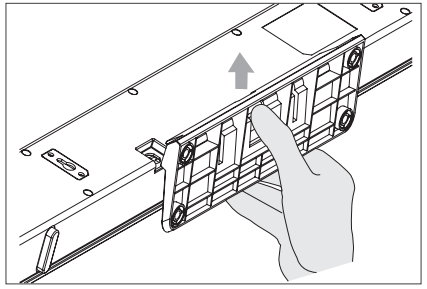

Disconnect
Press the button downwards to disconnect the stand from the unit.

Use the Non-Skid Pad

You can also use the non-skid pad to install this unit on a shelf or TV Stand

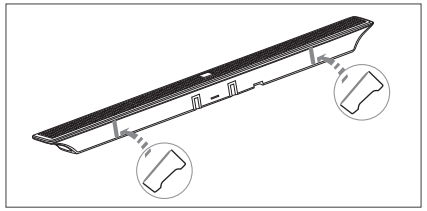

Be sure to put the bigger part of the pad towards the front panel of the unit.

Getting Started

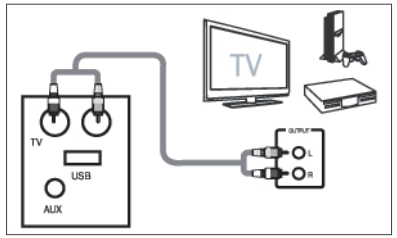

Connecting Your Device

Connect the Soundbar and the audio line.

Powering On

Make sure that the Soundbar is plugged into a power source. Push the on/off button on the Soundbar or on the remote. The Display Screen will light up when powered on.

USB Mode

Press Mode button to switch to USB Mode.



Insert your USB Drive. The USB port is on the left side of the soundbar.

Soundbar will automatically begin playing music in the order listed on your USB drive.

Control playback using the play/pause/prev/next buttons.
Press and hold the prev/next buttons to increase/decrease volume.
Playback can also be controlled using the Remote Control.

Playback will stop if the USB drive is removed. The memory function will continue playback from where it stopped when the USB drive is inserted again.



Press EQ button while in USB Mode to choose from a list of preset equalizer options: classical, jazz, movie, standard, etc.

Note: EQ function is not available in AUX Mode.

AUX Mode



Press Mode button to switch to AUX Mode.



Connect Soundbar to another device to stream music.

Note: MP3 Line-in and AUX Mode use the same audio input channel. Both cannot be played at the same time.

Bluetooth™ Mode



Press Mode button to switch to Bluetooth Mode.

Connect a Bluetooth enabled device to your Soundbar to stream music wirelessly.

You will hear a tone, and a green light will flash
Scan for devices in your Bluetooth settings.
Connect to ESB210 when scan has completed.
The default password is: 0000

Remote Control

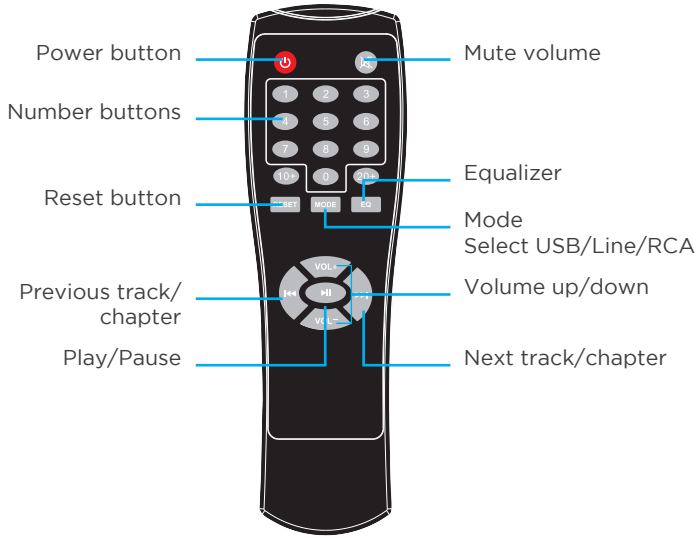

Specifications

35W 2.1 Channel Sound bar w/ built-in subwoofer
Ultra-thin 55mm/2.2" deep
Compatible with LED/LCD TV's
Frequency Response: 50Hz ~ 20KHz
Voltage AC: 100-240V/50-60Hz
Speaker Driver: 3" + 2.5" x 2
Input sensitivity: 850mVrms
Total Peak Power: 60W
USB, AUX in, AUX, MP3 Input

Customer Support

Visit ematic.us/support for customer support regarding your device.

To submit a request, fill out the required information online. You will be provided a ticket number regarding your issue, which you can refer to when contacting us further.

©2013 Ematic. All Rights Reserved. Bluetooth and the Bluetooth logo are trademarks of Bluetooth SIG, Inc and used by Ematic under a license. ©2012 Google Inc. All rights reserved. Android, Google, and other marks are trademarks of Google Inc. iPhone, and iPod are trademarks of Apple, Inc. Ematic is not affiliated with Microsoft, Apple, Inc., Google, Inc., (including Android). 1 year warranty from date of purchase, 90 days only on labor.